



Beech

Design and Manufacturing

LOAD

REDI™

LIFT TABLES

- Light Duty
- Medium Duty
- Portable
- Tilt



Beech

LOAD
REDI

TILT TABLES



Beech **LOAD REDI™** Tilt Tables are designed for multiple applications enabling the work to be positioned up to 45 degrees, decreasing the need for workers to stretch, lift and bend.

- Capacities 750 to 6000 lbs.
- Internally mounted power unit
- 1/2 HP Motor (115/1/60) is standard on RTL Series
- 1 HP Motor (115/1/60) is standard on RMT Series
- Hand controls and a 10 foot cord are standard.
- 8" lip is standard
- Velocity fuse equipped cylinders



Popular Options:

- 30 and 60 degrees tilt is available (consult factory)
- Floor stands are available (consult factory)
- Lift table mounted units (lift and tilt)
- Foot controls with cover
- 90 degree upender
- Lip to 24"
- Accordion skirt

RTL-Series 7 1/2" Lowered Height														
24"W x 36 5/8" L Platform					36"W x 36 5/8" L Platform					48"W x 48 5/8" L Platform				
Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*	Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*	Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*
RTL 45 - 7.5 - 2W	750	45	20 sec.	180	RTL 45 - 7.5 - 3W	750	45	20 sec.	220	RTL 45 - 7.5 - 4W	750	45	20 sec.	260
RTL 45 - 10 - 2W	1000	45	21 sec.	190	RTL 45 - 10 - 3W	1000	45	21 sec.	240	RTL 45 - 10 - 4W	1000	45	21 sec.	280
RTL 45 - 15 - 2W	1500	45	23 sec.	220	RTL 45 - 15 - 3W	1500	45	23 sec.	260	RTL 45 - 15 - 4W	1500	45	23 sec.	300

RMT-Series 7 1/2" Lowered Height														
24"W x 36 5/8" L Platform					36"W x 36 5/8" L Platform					48"W x 48 5/8" L Platform				
Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*	Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*	Model No.	Tilt Capacity	Tilt Degree	Raise Time	Wt. (lbs.)*
RMT 45 - 20 - 2W	2000	45	18 sec.	380	RMT 45 - 20 - 3W	2000	45	18 sec.	400	RMT 45 - 20 - 4W	2000	45	18 sec.	420
RMT 45 - 40 - 2W	4000	45	20 sec.	400	RMT 45 - 40 - 3W	4000	45	20 sec.	420	RMT 45 - 40 - 4W	4000	45	20 sec.	440
RMT 45 - 60 - 2W	6000	45	22 sec.	410	RMT 45 - 60 - 3W	6000	45	22 sec.	430	RMT 45 - 60 - 4W	6000	45	22 sec.	460

* All weights are approximate


Beech is not responsible for printed errors. Design changes may occur without notice. Call Beech for more information.

MEDIUM DUTY SCISSOR LIFTS



LOAD REDI™ Tables can help maximize worker productivity while providing an ergonomically friendly workplace.

- Capacities 2000 to 7000 lbs.
- Three Platform Sizes: 24", 36" and 48" wide are standard on all models.
- Vertical Travel: 24", 36" and 48"
- Internally Mounted Power (motor, hydraulic pump and reservoir). Easy to remove for repair and maintenance.
- Motors: Single phase and three phase can be interchanged on most models.
- Rugged Steel Weldments (base, cross member, legs and platform) provide rigidity and stability.
- Hinged Platform for quick access to power pack and cylinder.

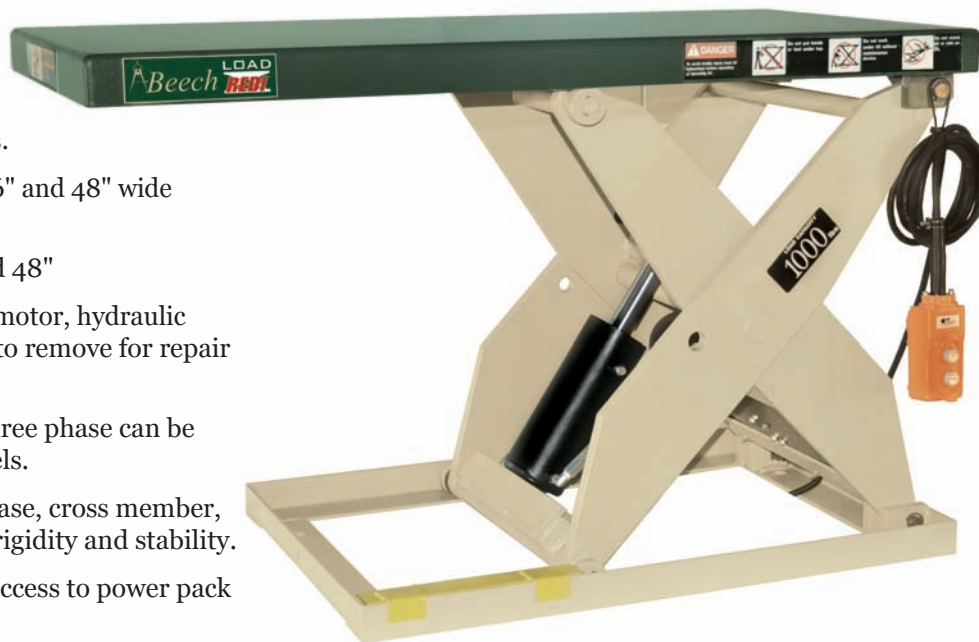

RM-24 Series 24" Travel, 31 1/4" Raised Height x 7 1/4" Lowered Height											
24"W x 36 5/8" L Platform				36"W x 36 5/8" L Platform				48"W x 48 5/8" L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 24-20-2W	2000	14 sec.	330 lbs.	RM 24-20-3W	2000	14 sec.	380 lbs.	RM 24-20-4W	2000	14 sec.	410 lbs.
RM 24-40-2W	4000	29 sec.	350 lbs.	RM 24-40-3W	4000	29 sec.	400 lbs.	RM 24-40-4W	4000	28 sec.	430 lbs.
RM 24-60-2W	6000	33 sec.	400 lbs.	RM 24-60-3W	6000	33 sec.	450 lbs.	RM 24-60-4W	6000	33 sec.	480 lbs.

RM-36 Series 36" Travel, 43 1/4" Raised Height x 7 1/4" Lowered Height											
24"W x 48 5/8" L Platform				36"W x 48 5/8" L Platform				48"W x 48 5/8" L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 36-20-2W	2000	27 sec.	440 lbs.	RM 36-20-3W	2000	27 sec.	490 lbs.	RM 36-20-4W	2000	27 sec.	520 lbs.
RM 36-30-2W	3000	28 sec.	480 lbs.	RM 36-30-3W	3000	28 sec.	530 lbs.	RM 36-30-4W	3000	28 sec.	560 lbs.
RM 36-40-2W	4000	49 sec.	520 lbs.	RM 36-40-3W	4000	49 sec.	590 lbs.	RM 36-40-4W	4000	49 sec.	600 lbs.
RM 36-50-2W	5000	31 sec.	650 lbs.	RM 36-50-3W	5000	31 sec.	720 lbs.	RM 36-50-4W	5000	31 sec.	710 lbs.
RM 36-60-2W	6000	37 sec.	680 lbs.	RM 36-60-3W	6000	37 sec.	130 lbs.	RM 36-60-4W	6000	37 sec.	760 lbs.
RM 36-70-2W	7000	43 sec.	690 lbs.	RM 36-70-3W	7000	43 sec.	740 lbs.	RM 36-70-4W	7000	43 sec.	770 lbs.

RM-48 Series 48" Travel, 55 1/4" Raised Height x 7 1/4" Lowered Height											
24"W x 64 5/8" L Platform				36"W x 64 5/8" L Platform				48"W x 64 5/8" L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 48-20-2W	2000	18 sec.	740 lbs.	RM 48-20-3W	2000	18 sec.	770 lbs.	RM 48-20-4W	2000	18 sec.	800 lbs.
RM 24-40-2W	4000	33 sec.	790 lbs.	RM 46-40-3W	4000	33 sec.	840 lbs.	RM 48-40-4W	4000	33 sec.	870 lbs.
RM 24-60-2W	6000	48 sec.	840 lbs.	RM 48-60-3W	6000	48 sec.	890 lbs.	RM 48-60-4W	6000	48 sec.	920 lbs.

* All weights are approximate

Beech is not responsible for printed errors. Design changes may occur without notice. Call Beech for more information.

LIGHT DUTY SCISSOR LIFTS



LOAD REDI™ Light Duty scissor lifts are designed for lifting and work applications in (3) standard platform sizes. Rugged construction combined with quality electrical and mechanical components provide years of safe and reliable performance.



- Capacities 750 to 1500 lbs.
- Standard base is 24" wide. (36" and 48" platform models have 6" and 12" stability legs.)
- 1/3 HP Motor (115/230 volt, 1 phase, 60 cycle.) Power up and down are standard.
- Hand controls and a 10 foot cord are standard.
- Velocity fuse equipped cylinders.
- Listed capacities are based on uniform loads. (Consult factory for side/end capacities.)

RL-24 Series 24" Travel, 30¹/₄" Raised Height x 6¹/₄" Lowered Height											
24"W x 36⁵/₈" L Platform				36"W x 36⁵/₈" L Platform				48"W x 48⁵/₈" L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RL 24-7.5-2W	750	15 sec.	260 lbs.	RL 24-7.5-3W	750	15 sec.	280 lbs.	RL 24-7.5-4W	750	15 sec.	300 lbs.
RL 24-10-2W	1000	17 sec.	270 lbs.	RL 24-10-3W	1000	17 sec.	290 lbs.	RL 24-10-4W	1000	17 sec.	310 lbs.
RL 24-15-2W	1500	21 sec.	280 lbs.	RL 24-15-3W	1500	21 sec.	300 lbs.	RL 24-15-4W	1500	21 sec.	320 lbs.

RL-36 Series 36" Travel, 42¹/₄" Raised Height x 6¹/₄" Lowered Height											
24"W x 36⁵/₈" L Platform				36"W x 36⁵/₈" L Platform				48"W x 48⁵/₈" L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RL 36-7.5-2W	750	19 sec.	320 lbs.	RL 36-7.5-3W	750	19 sec.	340 lbs.	RL 36-7.5-4W	750	19 sec.	360 lbs.
RL 36-10-2W	1000	24 sec.	330 lbs.	RL 36-10-3W	1000	24 sec.	350 lbs.	RL 36-10-4W	1000	24 sec.	370 lbs.
RL 36-15-2W	1500	42 sec.	340 lbs.	RL 36-15-3W	1500	42 sec.	360 lbs.	RL 36-15-4W	1500	42 sec.	380 lbs.

* All weights are approximate

Beech is not responsible for printed errors. Design changes may occur without notice. Call Beech for more information.

PORTABLE SCISSOR LIFT TABLES



LOAD REDI™ portable tables will make quick work of raising and lowering a loaded platform. A 12 volt gelled electrolyte (Gel Cell) battery is leak-proof and maintenance free.

Easy to maneuver, these portable tables are ideal for picking orders, feeding machinery and using as an assembly station.



Popular Options:

- Turntables: 24" and 36" round or square
- Wheels: steel, rubber or polyurethane
- Capacities 750 to 1500 lbs.
- 12 volt 45 amp gelled electrolyte (Gel Cell) battery
- 1/2 HP Motor
- Built-in charger
- Hand controls and a 10 foot cord are standard.
- Wheels: 5" rear, 3¹/₄" front
- Floor Lock
- Listed capacities are based on uniform loads
(Consult factory for side/end load capacities.)

Portable Scissor Lift Tables						
RP-24 Series, 24"W x 36"L Platform						
Model No.	Capacity	Raised Height	Lowered Height	Overall Size	Raise Time	Weight*
RP 24-7.5	750	34"	10"	24"W X 54"L	15 sec.	320 lbs.
RP 24-10	1000	34"	10"	24"W X 54"L	17 sec.	325 lbs.
RP 24-15	1500	34"	10"	24"W X 54"L	21 sec.	330 lbs.
RP-36 Series, 36"W x 48"L Platform						
Model No.	Capacity	Raised Height	Lowered Height	Overall Size	Raise Time	Weight*
RP 36-7.5	750	46"	10"	24"W X 66"L	19 sec.	380 lbs.
RP 36-10	1000	46"	10"	24"W X 66"L	24 sec.	385 lbs.
RP 36-15	1500	46"	10"	24"W X 66"L	42 sec.	390 lbs.

* All weights are approximate

Beech is not responsible for printed errors. Design changes may occur without notice. Call Beech for more information.

RAISE YOUR PROFITS ↑

LOWER YOUR COST ↓

Introducing the *all new* Beech **LOAD REDI™** line of stationary scissor lift tables available with Pneumatic or Electric Hydraulic power.

LOAD REDI™ lift tables are designed to lower your material handling costs while increasing productivity with many standard and optional features.



**LOAD
REDI™**



- ▶ *Velocity fuse equipped cylinder prevents accidental collapse*
- ▶ *Stabilizing legs on wide platform lifts*
- ▶ *Standard 24", 36" and 48" wide tops*
- ▶ *Designed and built to ANSI MH 29.1 specifications*
- ▶ *NEMA/IEC rated electrical components*

Options:

Oversize Platform in 2" increments up to 48" w and 60" long on Standard Lifts (36" wide on Light Duty Series).

Beveled Toe Guard Platform Edges at 30 degree angle (4" increase on all sides on standard size platform).

Pit Mounted (in ground) units require beveled edges and lifting eyes.

Portable Unit for moving empty lifts. Uses two wheel and a wheeled dolly handle.

Transportable Unit for moving workloads. Two wheel and two caster plus reinforced base. Increases lowered height (consult factory).

Fork Pockets for moving lift with fork truck.

Turntables: 24", 36" and 48" round or square (must conform to capacities of lift). Available with optional spring-activated detent. Stops at 90 degree increments.

Conveyer Tops and Ball Transfer Top Material: Consult factory.

Power: Larger HP motors, external mounted motors, and tilts available (consult factory).

Electrical: Hand-held NEMA 4 controls. Foot-operated control. Pedestal-mounted controls. Wall-mounted controls. Limit Switches for vertical travel.

Other Options: Accordion Skirt, Electro-Mechanical Toe Guard.



P.O. Box 947
New Philadelphia, OH 44663
1-800-726-9491
Fax: 330-343-3037
www.beech-design.com

